

(12)特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局(43) 国際公開日
2003年11月27日 (27.11.2003)

PCT

(10) 国際公開番号
WO 03/098614 A1

(51) 国際特許分類: G11B 7/09

(21) 国際出願番号: PCT/JP03/06095

(22) 国際出願日: 2003年5月16日 (16.05.2003)

(25) 国際出願の言語: 日本語

(26) 国際公開の言語: 日本語

(30) 優先権データ:
特願2002-142638 2002年5月17日 (17.05.2002) JP(71) 出願人 (米国を除く全ての指定国について): 松下電
器産業株式会社 (MATSUSHITA ELECTRIC INDUS-
TRIAL CO., LTD.) [JP/JP]; 〒571-8501 大阪府門真市
大字門真1006番地 Osaka (JP).(WADA, Takuya) [JP/JP]; 〒614-8334 京都府八幡市橋
本西刈又38-23 Kyoto (JP). 石橋 真 (ISHIBASHI, Shin)
[JP/JP]; 〒811-1323 福岡県福岡市南区弥永4-7-4-201
Fukuoka (JP).(74) 代理人: 特許業務法人池内・佐藤アンドパートナー
ズ (IKEUCHI SATO & PARTNER PATENT ATTOR-
NEYS); 〒530-6026 大阪府大阪市北区天満橋1丁目8
番30号OAPタワー26階 Osaka (JP).(81) 指定国 (国内): AE, AG, AL, AM, AT, AU, AZ, BA, BB,
BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK,
DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU,
ID, IL, IN, IS, JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT,
LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO,
NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU,
ZA, ZM, ZW.

(72) 発明者: および

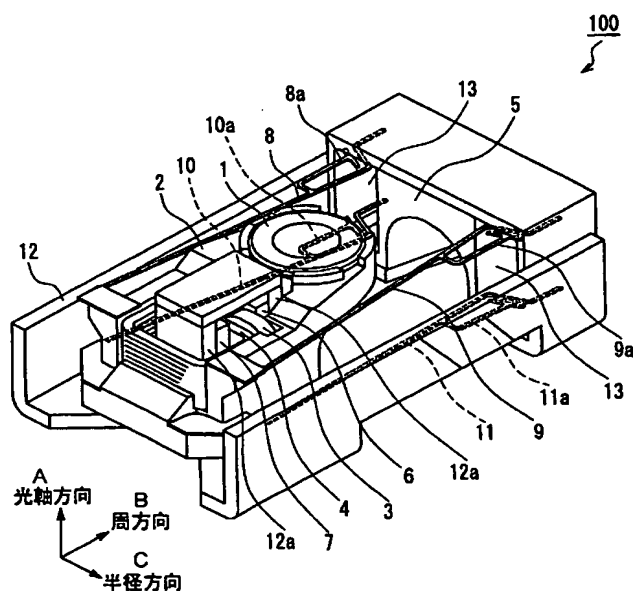
(75) 発明者/出願人 (米国についてのみ): 和田 拓也

(84) 指定国 (広域): ARIPO 特許 (GH, GM, KE, LS, MW, MZ,
SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア特許 (AM,

[続葉有])

(54) Title: OBJECTIVE LENS DRIVER

(54) 発明の名称: 対物レンズ駆動装置

A...DIRECTION OF OPTICAL AXIS
B...PERIPHERAL DIRECTION
C...RADIAL DIRECTION(57) Abstract: An objective lens driver comprises
an objective lens, a lens holder, a plurality of support
members for supporting the lens holder in such
a manner as to enable the objective lens to move
along the focusing direction and along the tracking
direction, a drive means for driving the lens holder,
a fixing member provided with a viscoelastic member
formed to hold each support member, each support
member including a linear section linearly formed
to connect to viscoelastic member provided in the
fixing member and to the lens holder, and at least one
arm branching from somewhere between the ends of
each linear section so as to reduce resonance of each
support member generated when the lens holder is
driven by the drive means.

[続葉有])



AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ特許
(AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB,
GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR),
OAPI 特許 (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

2文字コード及び他の略語については、定期発行される
各PCTガゼットの巻頭に掲載されている「コードと略語
のガイダンスノート」を参照。

添付公開書類:

— 国際調査報告書

(57) 要約:

対物レンズ駆動装置は、対物レンズと、レンズホルダと、フォーカシング方向とトラッキング方向とに沿って対物レンズが移動自在になるようにレンズホルダを支持する複数個の支持部材と、レンズホルダを駆動する駆動手段と、各支持部材を保持するように形成された粘弾性部材が設けられた固定部材とを具備しており、各支持部材は、固定部材に設けられた粘弾性部材とレンズホルダとに接続するように線状に形成された線状部と、駆動手段によってレンズホルダが駆動されるときに発生する各支持部材の共振を低減するように各線状部の途中から分岐して形成された少なくとも1つのアーム部とを含んでいる。